

Inquiry and order form for TAKTOMAT conveyor LFA (1)

Firm _____ E-Mail adress _____

Contact person _____ Project / Order no. _____

Tel. / Fax _____ Date _____

Type

- LFA080
- LFA100
- LFA125
- LFA150
- other type _____

Distance A [mm] _____

Number of links in line n_l _____

Stroke (0,5 x, 1 x, 2 x, 3 x or 4 x length of one link)

- vertical assembly (use only the links on top)
- horizontal assembly (the links on both sides can be used)

Mode of motion

- Stop mode (fixed index time, variable dwell time)
index time _____
- Continuous mode (fixed index and dwell time)
Number of cycles per minute _____
Ratio index time : dwell time (or angle) _____
- Flexible (with torque or servo motor)


Payload

Weight of a fixture _____


Weight of a workpiece _____

Distance from center point of mass of payload to surface of the link


vertical assembly





horizontal assembly



vertical assembly with protection




horizontal assembly with protection

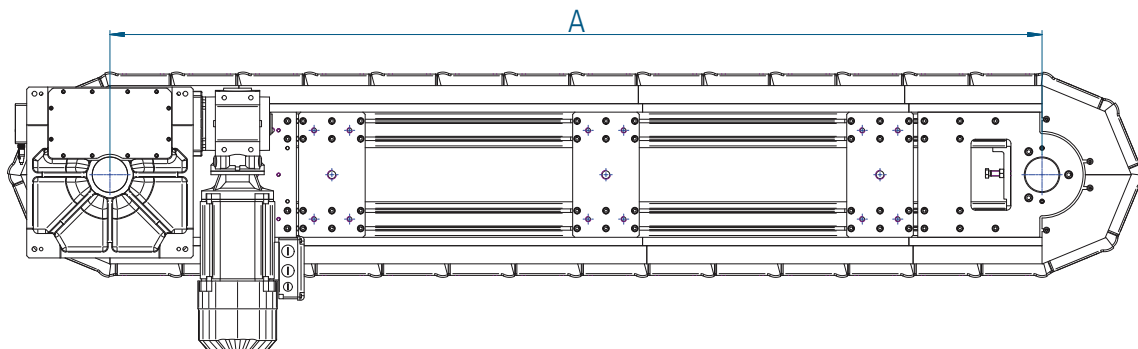


Inquiry and order form for TAKTOMAT conveyor LFA (2)

Possible mounting positions for the drive units

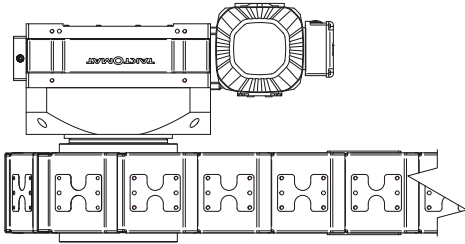


Right

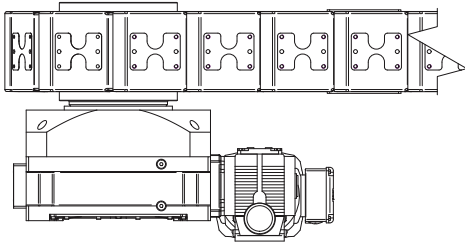


Left

Position of the free drive shaft

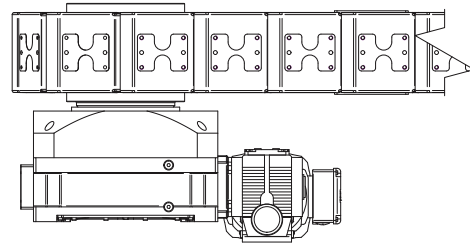

I (free drive shaft to the outside)

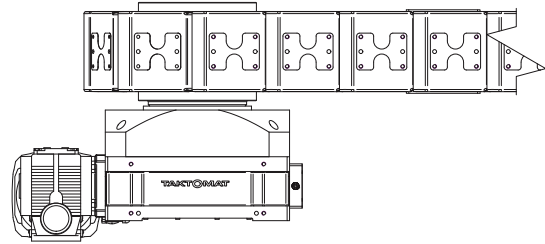

A (free drive shaft to the inside)

Drive

- With indexer type RTxxx
 Mounting position of drive L R
 Position of the free drive shaft A I (for vertical shaft)
 Motor voltage 230/400V 50Hz
 277/480V 60Hz
 other _____
- Brake Voltage 24V DC
 230V AC
 400V AC
 other _____
- with external drive (servomotor and gearbox or similar) _____
 Torque
 Without drive

Accessories

Color

- Cast housing RAL7016 other _____
 Color of the drive Fabricator color other _____ Universal Controller TIC yes no
 machined steel parts blued, aluminum parts nature
 Protection cover yes no